
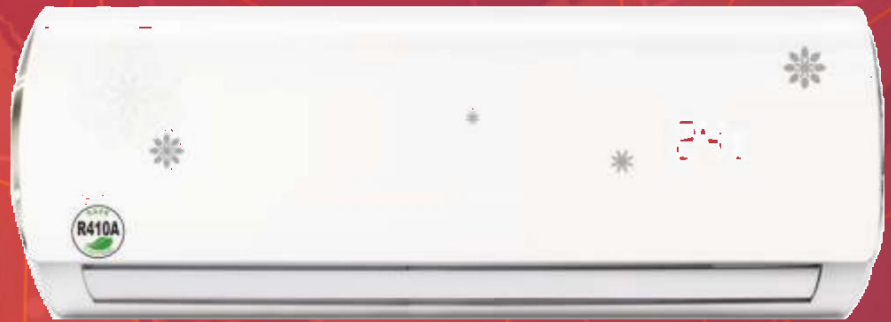


CATALOGUE

AIR CONDITIONERS

Breath Fresh ...

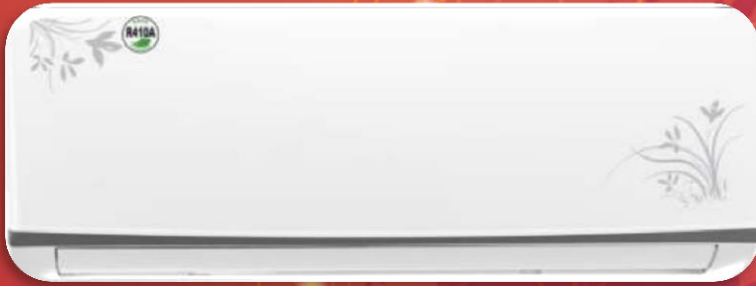

VIMAL SALES

Mob - +91 9323404942

Email – info@vimalsales.com
hbgandhi1960@gmail.com

Technical Specifications : -



3 Star Split Air Conditioner (INVERTER)

Model		1.0 Tr	1.5 Tr	2.0 Tr
Power supply	Ph-V-Hz	220V-240V~, 50Hz	220V-240V~, 50Hz	220V-240V~, 50Hz
Cooling Capacity	BTU	12000	18000	24000
Cooling Capacity	W	3223	4891	6153
Power Input cooling	W	1070	1750	2050
Rated Current	A	4.9	7.9	9.5
EER	W/W	3.00	2.85	3.00
ISEER		3.70	3.70	3.70
Moisture removal	L/h	1.2	1.7	2.2
Evaporator.Number of rows		2	2	2
Evaporator.Tube outside dia.and type	mm	φ6.35 Innegroove tube	φ7 Innegroove tube	φ7 Innegroove tube
Evaporator.Coil length x height x width	mm	612*280*22.6	700X336X25.4	778*315*25.4
Indoor air flow	m3/h	550	850	1200
Noise level	dB(A)	42	45	49
Indoor Unit dimension (W*H*D)	mm	790x206x274	900X224X291	1025x240x320
Packing (W*H*D)	mm	860x265x330	970x290x345	1105x315x405
Noise level	dB(A)	52	54	57
Outdoor Unit dimension (W*H*D)	mm	780*542*256	780*542*256	860*720*320
Packing (W*H*D)	mm	900*600*340	900*600*340	1015*775*445
Refrigerant type		R410A	R410A	R410A

3 Star Split Air Conditioner

Model		1.0 Tr	1.5 Tr	2.0 Tr
Power supply	Ph-V-Hz	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ
Cooling Capacity	BTU	12000	18000	24000
Cooling Capacity	W	3520	5280	7050
Power Input Cooling	W	1006	1509	2014
Rated Current	A	4.6	6.9	9.2
ERR	W/W	3.5	3.5	3.5
Moisture removal	L/h	1.2	1.8	2.2
Max. input consumption	W	1338	2006	2679
Max. current	A	6.3	9.4	12.6
Indoor Motor speed (TU/Hi/Mi/Lo)	RPM	1200	1150	1280
Evaporator.Number of rows		2	2	2
Evaporator.Tube outside dia.and type	mm	φ7	φ7	φ7
Evaporator.Coil length x height x width	mm	700x336x25.4	778x315x25.4	778x357x25.4
Indoor air flow	m3/h	820/720/620/520	1200/1050/900/800	1200/1050/900/800
Noise level	dB(A)	44/41/38/35	46/43/40/37	46/43/40/37
Indoor Unit dimension (W*H*D)	mm	900*220*291	1025*320*235	1025*320*235
Packing (W*H*D)	mm	970*290*345	1105*315*405	1105*315*405
Outdoor Motor speed	Rpm	880	880	850
Cond.Number of rows		2	2	2
Cond.Tube outside dia.and type	mm	φ5	φ7	φ7
Cond.Coil length x height x width	mm	761/742x507x23.14	915/893x672x25.4	966/936x748x38.1
Noise level	dB(A)	52	56	60
Outdoor Unit dimension (W*H*D)	mm	780*542*271	860*720*320	920*810*340
Packing (W*H*D)	mm	900*600*340	1015*775*445	1067*880*456
Refrigerant type		R410A	R410A	R410A

M/s. Vimal Sales Corporation

E-144, Dev Nagar, Near Bhatia School, New Sai Baba Nagar Road, Kandivali (W), Mumbai – 400 067. Maharashtra. INDIA. Email – info@vimalsales.com / Tel – 022 49727249 & +91-9619911691